IMTEC PENTHOUSE DOOR



BTA IMTEC

A BABCOCK POWER INC. SUBSIDIARY

OVERVIEW

Boiler Tube Company of America/Imtec has been manufacturing Access Doors for the power industry since 1984. We have over 20,000 units installed and have experience in all areas of the power plant from the boiler to the stack.

Imtec's penthouse doors are available in three standard sizes. With operating temperatures of 1000 degrees, these large penthouse doors permit quick access and rapid cooling of the boiler penthouse at forced outages.

The FLEXISEAL doors have one or more yokes with closing screws that act on center point(s) of the door. This flexes the door plate toward the interior and assures a tight seal with the gasket. When opening the door, special

safety features in the latch and screw mechanism(s) will assure that the latch pin cannot be removed easily until the door plate with its gasket is safely retracted from the sealing surface on the frame plate, thereby revealing any dangerous internal pressure and also preventing damage to the gasket.




Imtec Boiler Door with Tube Panel

FEATURES/BENEFITS

Common

- Safety mechanism impedes release of the latch on a door with pressure
- Open & close in seconds without tools
- Adequate sizes for easy entry
- Safety latch prevents injury and entrapment
- Heavy, durable, dependable design
- Quick, easy installation new or retrofit
- All stainless fasteners
- Frame constructed of A36 C-channel



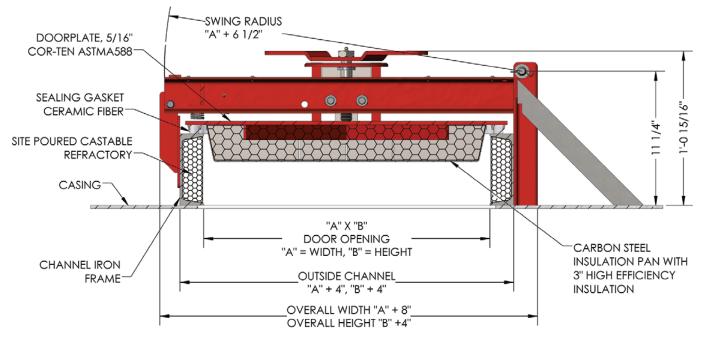

DOOR TYPE BP

DOOR TYPEBPTypicalBoiler PenthouseApplicationsVentilation & Quick Access.ApplicationsHot Air Ducts etc. Mainly with Interior InsulationOperating Temperature1000°FMax. Excursion1000°FDoor Size Width x Height Of Door Opening 24" X 48"Code Numbers For Standard Sizes (Other Sizes Available)24" X 48"BP-2448.3-2C20" X 40"PD 2040.2.26
Typical ApplicationsVentilation & Quick Access. Hot Air Ducts etc. Mainly with Interior InsulationOperating Temperature1000°FMax. Excursion1000°FDoor Size Width x Height Of Door Opening 24" X 48"Code Numbers For Standard Sizes (Other Sizes Available)24" X 48"BP-2448.3-2C
Temperature1000°FMax. Excursion1000°FDoor Size Width x Height Of Door Opening 24" X 48"Code Numbers For Standard Sizes (Other Sizes Available)24" X 48"BP-2448.3-2C
Door Size Width x Height Of Door OpeningCode Numbers For Standard Sizes (Other Sizes Available)24" X 48"BP-2448.3-2C
Of Door Opening(Other Sizes Available)24" X 48"BP-2448.3-2C
30" X 60" BP-3060.3-2C
48" X 84" BP-4884.3-2C

For further information on Boiler Tube Company of America/Imtec's patented (US 5,158,043, US 4,574,973, US 4,685,586, US 6,412,221, US 7,389,610, with other patents pending) Penthouse Door, please contact:

Dennis Turner Ph: 864-336-4424 Cell: 864-524-2009 Email: dennisturner@babcockpower.com

Tina Wilson Ph: 864-485-0629 Cell: 508-723-4018 Email: twilson@babcockpower.com

SAFETY³ PEOPLE. POWER. PROJECTS.

We're giving safety the third degree.

Babcock Power Inc. and its subsidiaries place the safety, health and security of our people at the core of our company values. Our team is our most valuable resource, generating solutions everyday to deliver safe, clean, reliable energy globally. With a keen focus on safety, Babcock Power Inc. conducts business in a manner that protects our people, our customers and the environment. From innovation to generation, we are proud of our award-winning safety record and are committed to operating with integrity and excellence.

The data contained herein is solely for your information and is not offered, or to be construed, as a warranty or contractual responsibility. © Boiler Tube Company of America, 2020

